



Real-Time Location & Condition Tracking



REAL-TIME SOLUTIONS
Shipment location & conditions



HYPER-ACCURATE LOCATION
to within meters/feet



BEST GLOBAL COVERAGE
186 countries; high reliability



24/7 LIVE MONITORING
From logistics experts


Tive Solo Trackers

The Tive™ Solo is cost-effective tracker that captures and transmits hyper-accurate location, temperature, humidity, and light exposure—in real time.

Tive Solo trackers use the latest cellular and WiFi technologies to report real-time sensor data to the Tive cloud application—making it easy to monitor shipments, reduce excursions, and improve on-time and in-full deliveries.

The Tive cloud application aggregates your shipment data in real time, and sends alerts when things go wrong—enabling you to take immediate action to minimize product damage. The Tive solution is fully compliant with ISO 27001:2022.

Tive Solo trackers have a long battery life, and can be single use or reused to support sustainability initiatives.

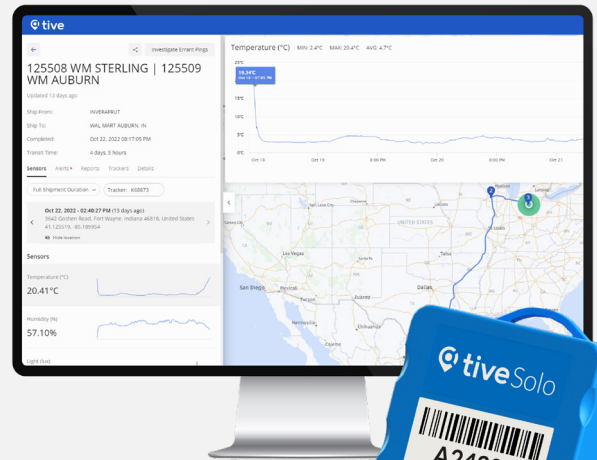

 **Committed to Sustainability**
The Tive Solo can be recycled with Tive's Get Green Program.

Designed for these shipments



Cold Chain



Transportation



High-Value



Food & Beverage

TT-5010 Specifications

GLOBAL CELLULAR CONNECTIVITY

Transmission Type:

GSM / GRPS

Global quad-band: 850/900/1800/1900 MHz

Communication Interval:

5 - 720 min, programmable, event-driven immediate communication (excursion)

LOCATION

Location Method:

Cellular, Wi-Fi Geolocation

Location Accuracy:

Wi-Fi Geolocation: 100 m (<200 feet)

Cellular Triangulation: 500 m (0.3 miles)

OPERATING RANGE

-20°C to 60°C (-4°F to 140°F)

DISPLAY INDICATOR

LED lights indicate Start and Status

SENSORS

Condition Sensors:

Temperature, Light, Motion

Temperature Accuracy:

±0.5°C (±0.9°F)

NIST® Traceable

Measurement Interval:

5 - 720 min, programmable

Measurement Capacity:

Up to 4,000 records

BATTERY

Rechargeable Lithium-Ion battery

(3.7 V, 2000 mAh / 7.4 Wh capacity)

Active life: 30 days (60 min reporting interval)

Shelf life: 180 days

CASE SPECIFICATIONS

Case Material:

UL 94-V0 flame-retardant plastic

Dimensions:

86 x 52 x 17.5 mm (3.4 x 2.1 x 0.7 in)

Weight:

76 g (2.7 oz)

IP Rating:

IP66

Mounting:

3M Adhesive, Cable Zip Tie

CERTIFICATIONS

FCC, CE, RoHS, UN38.3



For learn more about Tive Solo trackers, please contact us at sales@tive.com.

Condition Sensors



Temperature



Light



Motion